

Arche

World's most cost-effective femtosecond OEM fiber laser component

A suite of ultra-fast OEM fiber laser component with 65 ± 2 MHz repetition rate, centered at 1550 ± 5 nm, delivering ≤ 250 fs. Arche becomes a workhorse tool for many research and industrial applications requiring reliability and affordability.



Central Wavelength
 $1550 \text{ nm} \pm 5 \text{ nm}$

Repetition Rate
 $65 \text{ MHz} \pm 2 \text{ MHz}$

Average Power
 $\sim 25 \text{ mW}$

Pulse Width
 $\leq 250 \text{ fs}$

/ Applications



Amplifier Seeding
Optical Characterization
Ultrafast Spectroscopy
Testing at telecom wavelengths

Arche

/ Technical Specifications


Wavelength:	Repetition Rate	Pulse Width:	Average Power:
1550 ± 5 nm	65 ± 2 MHz	≤ 250 fs	~ 25 mW

Central Wavelength:	1550 ± 5 nm
Spectral Bandwidth:	> 15 nm
Repetition Rate:	65 ± 2 MHz
Average Power:	~ 25 mW
Pulse Width:	≤ 250 fs
Polarization:	Linearly Polarized
Output Port:	Single mode fibre. 0.30 m length (customizable)
Optical Output:	FC/PC Connector
Synchronization:	Optical Signal
Pulse Energy:	300 - 600 pJ
Peak Power:	1 - 3 kW
Spatial Mode Quality (M^2):	< 1.2
Cooling:	Air cooling
Power Requirements:	110 V - 220 V / 50 Hz-60 Hz
Operating Temperature:	20 - 30 °C
Storage Temperature:	0 - 60 °C
Dimensions:	200 x 120 x 53 mm (WxDxH)
Control:	Only using software via USB

OTHER DETAILED SPECS UNDER REQUEST

Arche

/ Optical Spectrum

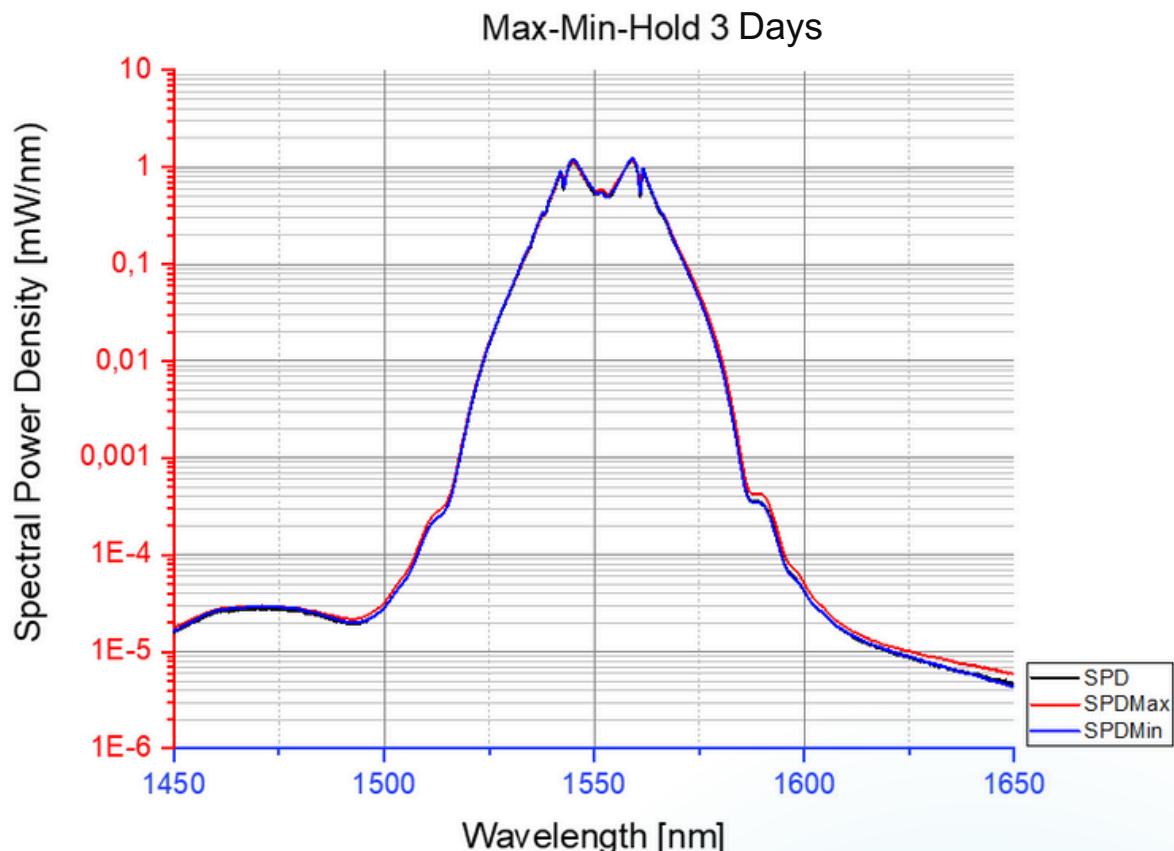

Arche

/ Additional information



The ARCHE laser module is supplied strictly as an OEM laser component intended for integration into a host system or setup. It is not a finished laser product and therefore does not include the safety features required for a Class 3B laser product.

Warranty:

12 months warranty or > 10,000h of continuous operation.

Extended warranty on request.

/ FYLA contact

Sales contact

sales@fyla.com

+34 607 97 10 21

*The price may be different in the APAC area.