

Horizon^{v2}

Supercontinuum Fiber Laser with Ultra Flat Spectrum

The Horizon Supercontinuum Fiber Laser is a cutting-edge optical source designed to redefine performance in spectroscopy and imaging. With an ultra-flat spectrum, free of spurious spectral peaks, it spans an impressive spectral range of 410 and 2300 nm.

With its spatial coherence, broad spectral coverage and spectral flatness, Horizon outperforms traditional light sources.

Ideal for advanced scientific and industrial applications, including fluorescence lifetime imaging and beyond, where consistent, high-quality illumination is critical. Whether in research or industrial environments, Horizon empowers users with a robust, high-performance solution for their optical needs.

Spectral Range

410 - 2300 nm

Average Power

≥ 4 W

Visible Range (410-850 nm)

Average Power:

≥ 300 mW



/ Highlights

Ultra Flat Spectrum

Outstanding Power Stability



/ Applications

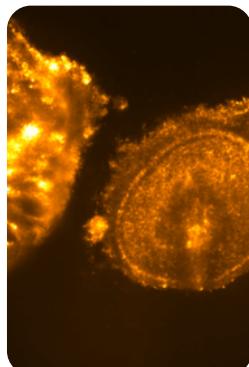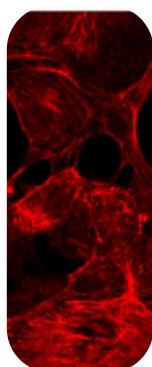

Microscopy

Fluorescence-lifetime imaging microscopy (FLIM)


Time-correlated single-photon counting (TCSPC)

FRET imaging

Lifetime measurement

Horizon^{v2}

/ Typical Optical Spectrum

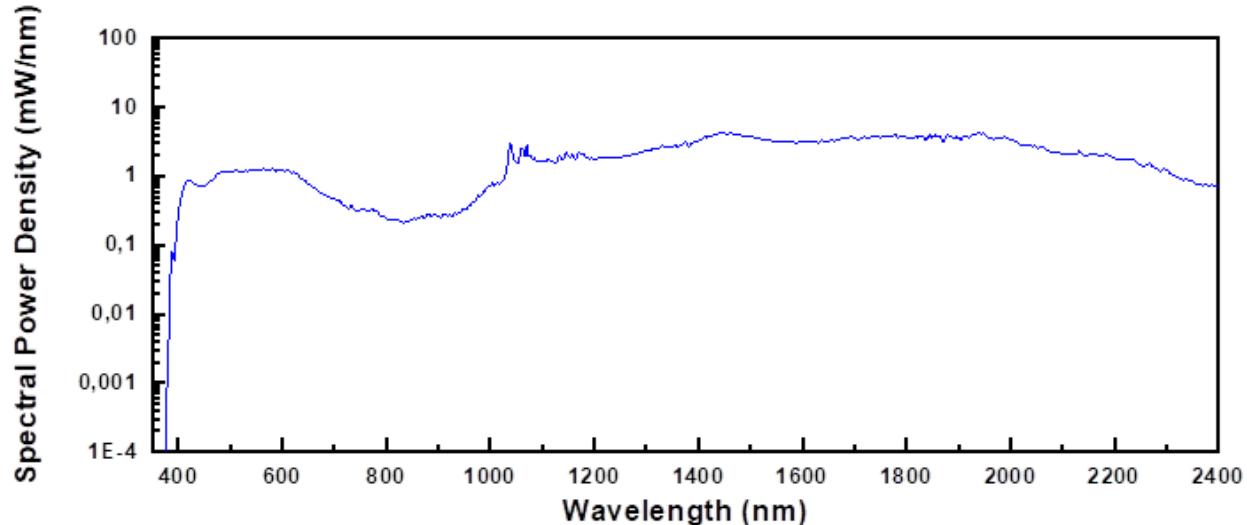

/ Accessories

Tunable Visible Range

BOREAL and BOREAL NIR are the accessories for supercontinuum lasers to choose any wavelength.

The perfect white laser plug-in accessory for bioimaging, nanophotonic and more.



Spectral Range:

400* - 1000 nm / 1000 - 1700 nm

Optical Output:

Free space or Fibre output (1 m) (Collimated output customizable)

Bandwidth:

10 - 600 nm

Simultaneous selectable band:

1

Resolution:

1 nm

Insertion losses (full bandwidth):

≤ 10 % (free space output)

≤ 30 % (Multimode fibre output)

≤ 60 % (Single-mode fibre output)

* Initial wavelength depends on the supercontinuum source

Horizon^{V2}


/ Technical Specifications

Spectral Range: 410 - 2300 nm	Average Power: ≥ 4 W	Visible Range (410-850 nm) Average Power: ≥ 300 mW
Pulse Repetition Rate:	80 ± 2 MHz	
Power Stability:	≤ 0.5 % (std. dev.)	
Pulse Duration:	≤ 10 ps @ 1060 nm ≤ 250 ps full spectrum*	
Polarization:	Unpolarized	
Output Port:	Single Mode Fiber. 1 m length (customizable)	
Optical Output:	Collimated (in the range 450 - 1000 nm) Single-mode across full spectrum	
Synchronization / Connections:	TTL (SMA)	
Beam Diameter @ 1 m of distance:	$@ 470$ nm ≤ 2 mm / $@ 580$ nm ≤ 2.5 mm / $@ 725$ nm ≤ 3.5 mm / $@ 1150$ nm ≤ 5.5 mm	
Spatial Mode Quality (M ²):	≤ 1.2	
Cooling:	Thermoelectric cooler + air cooling	
Power Requirements:	110V - 220 V / 50 Hz-60 Hz	
Operating Temperature:	20 - 30 °C	
Storage Temperature:	0 - 60 °C	
Dimensions:	436x560x151 (WxDxH)	
Control:	Manual / Software via USB	
Safety Connections:	Interlock / Key	



151 mm

436 mm

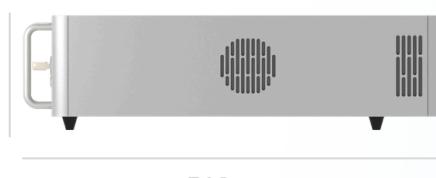

560 mm

*Estimated value

Horizon^{v2}

Supercontinuum Fiber Laser with Ultra Flat Spectrum

/ Additional information

Laser Safety:



This product is a Class 4 laser.

CAUTION – VISIBLE AND INVISIBLE LASER RADIATION!
AVOID EYE AND SKIN EXPOSURE TO DIRECT OR SCATTERED
RADIATION.

Appropriate safety measures according to such laser class
should be taken in its installation and use.

Warranty:

12 months warranty.

Extended warranty on request.



/ FYLA contact

Sales contact

sales@fyla.com

+34 607 97 10 21